

Call list

1. View call history list on webpage.

Phonebook

1. Add speed dial contacts on webpage.

Speed dial

1. Configure speed dial on webpage (Number keys 0-9).
2. Long press the corresponding number key to achieve speed dial.

Redial

1. Press **⓪**, redial a call number.

Do not disturb


1. Enable the device do not disturb mode on webpage.



H2U

Quick Installation Guide

Packaging list

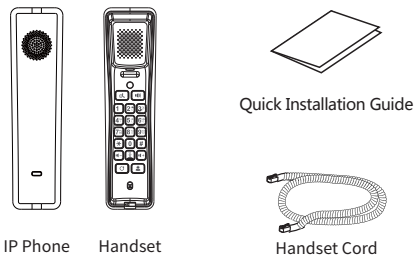

Keys features



Hold key, Hold/Resume the call



Hands-free key
Activate/deactivate hands free



Mute key, with red color LED
In idle mode: ringer off
In communication mode:
mute/un-mute a call



Volume +/- key
In idle mode or during ringing:
increase or decrease ringer volume
In communication: increase or
decrease earpiece, headset or
hands-free volume



Status indicator
with two-color LED



Redial key, Access to
redial the last record




DSS Key, It can be set as
function key/speed dial
key, etc.

Installation the device

• Wall mounting (without screws and screw anchors)


- 1) Drill two holes in the wall, the vertical distance between the two holes is 136.2 or 161.2mm;
- 2) Drive in 2 screw anchors and screws in turn;
Note : 5mm is reserved between the screw cap and the wall for easy installation of the phone base.
- 3) Connect the Ethernet cord, handset cord and power;
- 4) Align the wall mounting holes on the base with the screws made in step 2, slide down to complete the installation.



• Connecting to the Device

Please connect power adapter, network and handset to the corresponding ports as described in below picture.

- ① Power port: connect the power adapter;
- ② Network port: connecting local area network or internet;
- ③ Handset port: connect IP Phone handset.

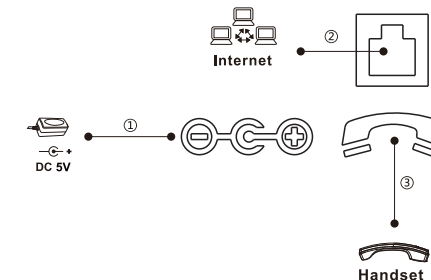

Configuration

Configuration via Web

1. Get the IP : Long press **#** key, the IP Phone will report the IP address by itself.
2. Login: Input the IP address in the web browser. The PC and phone should be in the same IP address segment(The default username and password are both 'admin' .)
3. Configure: Select network/Account, etc. and fill the relevant content.
4. Save the configuration.

Making a call

1. **Direct dialing**: lift the handset and enter the phone number, press **#** key .
2. **Hands-free**: enter phone number press **#** key and press **📞** or vice versa.

Accepting a call

1. **With the handset**: pick up the handset.
2. **With the hands-free**: press **📞** .

Putting a call on hold/resume

1. Press **📞** key, caller is put on hold.
2. Press again to **📞** key , resume the call.

Call Mute

1. Press **🔇** to Mute the microphone during the call.
2. Press **🔇** again to un-mute the conversation.